

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number  
WO 01/98753 A1

(51) International Patent Classification: G01N 17/02

(21) International Application Number: PCT/GB01/02543

(22) International Filing Date: 8 June 2001 (08.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0015349.4 23 June 2000 (23.06.2000) GB


(71) Applicant and

(72) Inventor: ATHERTON, Eric [GB/GB]; 83 Wroslon  
Road, Preeland, Witney, Oxfordshire OX8 8HL (GB).(74) Agents: DOWNING, Michael, Philip et al.; Fry Heath &  
Spence, The Old College, 53 High Street, Horley, Surrey  
RH6 7BN (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,  
ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendmentsFor two-letter codes and other abbreviations, refer to the "Guide-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: CORROSION MONITORING

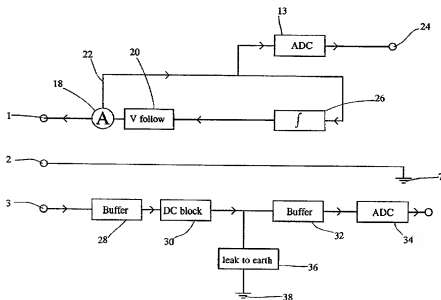

(57) Abstract: A corrosion monitor comprising electronic circuitry arranged such that DC current flowing between two electrodes is reduced to essentially zero, while allowing any naturally occurring AC current noise to flow unhindered and be monitored by the instrumentation. The two electrodes consist of one inert reference electrode, and one electrode constructed of the material to be monitored (the working electrode). Even though the two electrodes will have different galvanic potentials, by reducing the DC current to zero the electronic circuitry is able to avoid galvanic effects. Furthermore, the voltage potential can be monitored between the inert current reference electrode, and a third electrode also constructed of an inert material. As corrosion activity occurs on the working electrode, both current noise and voltage noise may then be monitored simultaneously.